

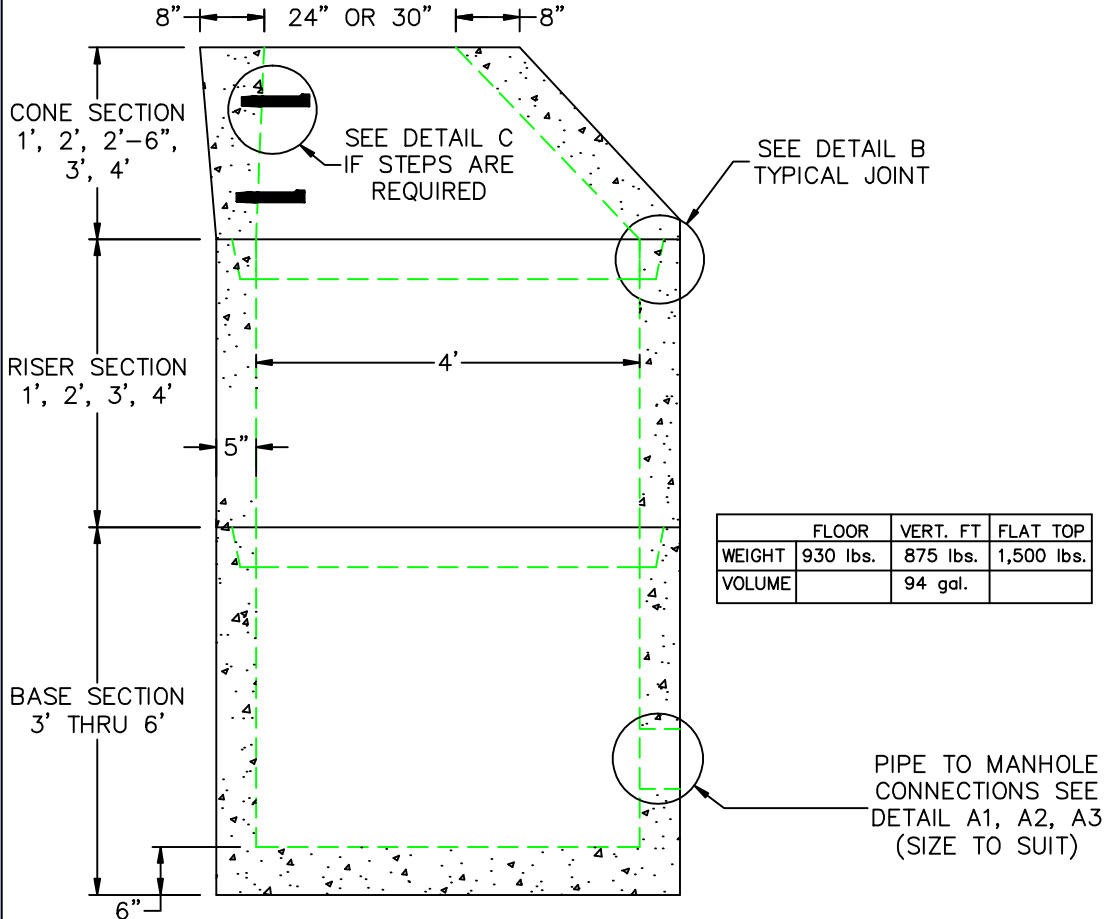
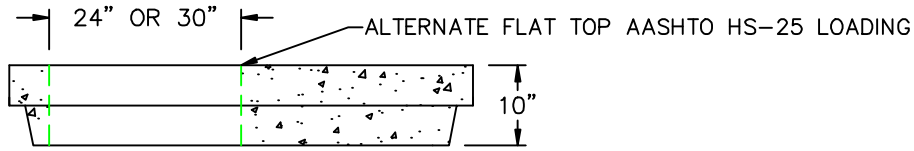





# 4' DIA DRAIN MANHOLE



	FLOOR	VERT. FT	FLAT TOP
WEIGHT	930 lbs.	875 lbs.	1,500 lbs.
VOLUME		94 gal.	



- DESIGN NOTES:
1. MANUFACTURED TO MEET OR EXCEED: ASTM C-478 & AASHTO M 199 SPECS.
  2. CONCRETE = 5,000 PSI. MINIMUM CEMENT PER ASTM C-478 (6.1)
  3. REINFORCED STEEL CONFORMS TO LATEST ASTM A 185 SPECIFICATIONS. 0.12 SQ. IN / LINEAL FT. AND 0.12 SQ. IN (BOTH WAYS) BASE BOTTOM
  4. STEEL REINFORCEMENT TO MEET OR EXCEED AASHTO HS-25 LOADING
  5. MANHOLE STEPS MEET LATEST OSHA REGULATION 29 CFR1910.27, SECTION 16 OF ASTM SPECIFICATION C478 AND SECTION 10 OF ASTM SPECIFICATION C497
  6. BUTYL RUBBER JOINT SEALANT PER ASTM C-990 & ASHTO M-198
  7. WATER PROOFING PER CONTRACT SPECS. AS REQUIRED
  8. ONE POUR MONOLITHIC BASE SECTION



SCITUATE RAY PRECAST  
 120 CLAY PIT ROAD  
 MARSHFIELD, MA 02050  
 PHONE # 1-800-440-0009  
 FAX # 781-837-4320



CONTRACTOR:		JOB NAME:	
DATE:	DDRAWING: SRP-DMH4	DRAWING BY: JOHN KASPER	