


# 36" RCP O-RING JOINT REINFORCED

## DESIGN NOTES:

1. MFG. IN ACCORDANCE WITH ASTM SPEC. C76 & AASHO SPEC. M170, WALL B.
2. CEMENT TYPE II
3. CONCRETE STRENGTH CLASS III & IV 4,000psi CLASS V 6,000psi
4. CIRCUM. REINFORCEMENT:
 

CLASS III	0.17 SQ. IN. PER FT. INNER CAGE
	0.13 SQ. IN. PER FT. OUTER CAGE
CLASS IV	0.30 SQ. IN. PER FT. INNER CAGE
	0.22 SQ. IN. PER FT. OUTER CAGE
CLASS V	0.50 SQ. IN. PER FT. INNER CAGE
	0.38 SQ. IN. PER FT. OUTER CAGE
5. LAYING LENGTH 8'-0"
6. RUBBER GASKET ASTM SPEC. C443 & C361

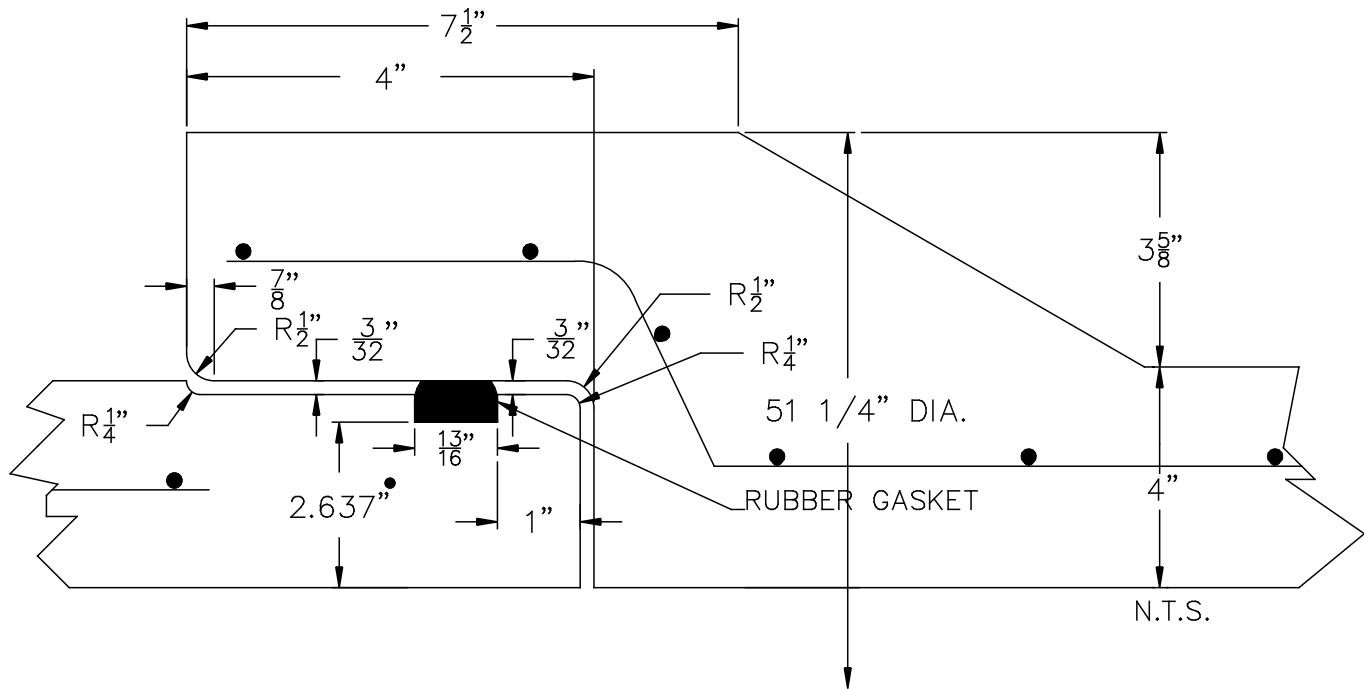

SCITUATE CONCRETE PIPE  
 P.O. BOX 870 \* 1 BUCKEYE LANE  
 SCITUATE, MA 02066  
 PHONE # 1-800-322-4488  
 FAX # 781-545-6021

CONTRACTOR:		JOB NAME:	
DATE:	APPROVED BY:	DRAWING BY: C.J. SCOTT	