


# 27" RCP O-RING JOINT REINFORCED

DESIGN NOTES:

1. MFG. IN ACCORDANCE WITH ASTM SPEC. C76 & AASHO SPEC. M170, WALL B.
2. CEMENT TYPE II
3. CONCRETE STRENGTH CLASS III & IV 4,000psi CLASS V 6,000psi
4. CIRCUM. REINFORCEMENT:  
 CLASS III 0.16 SQ. IN. PER FT.  
 CLASS IV 0.31 SQ. IN. PER FT.  
 CLASS V 0.38 SQ. IN. PER FT. INNER CAGE  
 0.23 SQ. IN. PER FT. OUTER CAGE
5. LAYING LENGTH 8'-0"
6. RUBBER GASKET ASTM SPEC. C443

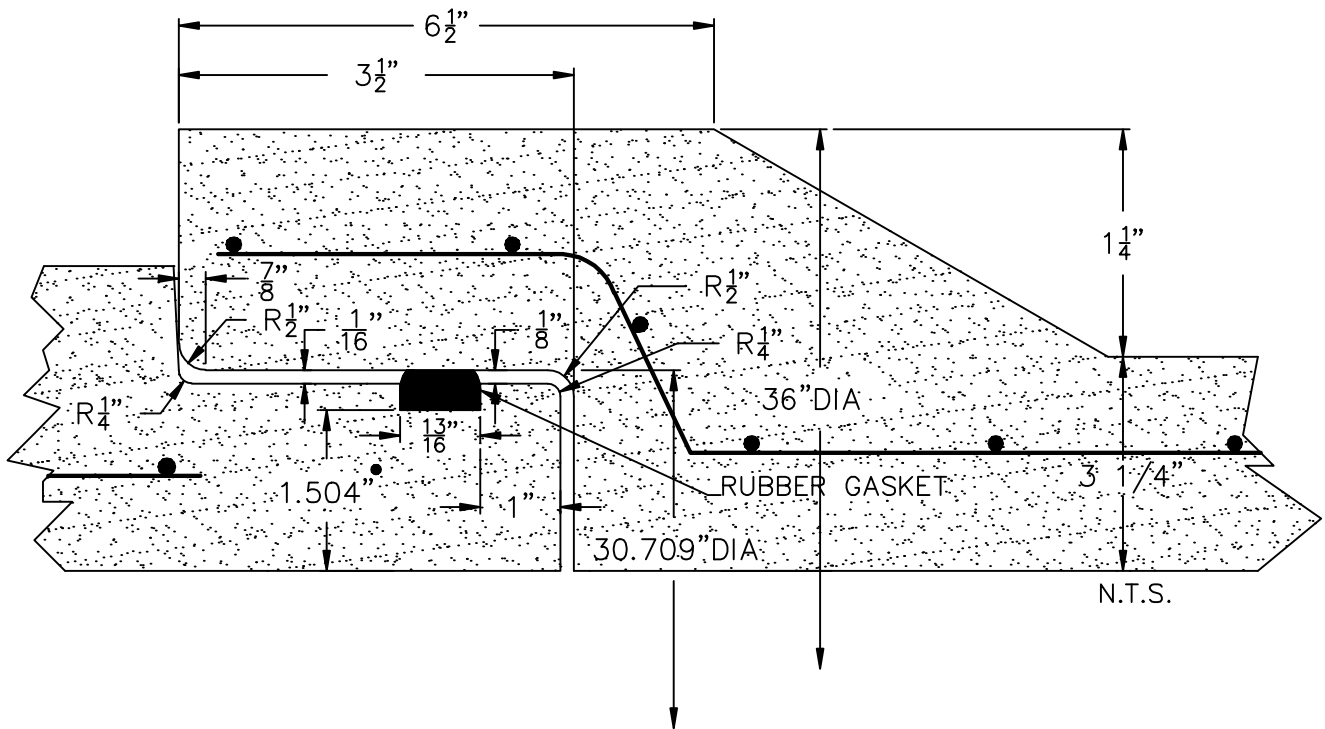


**SCITUATE**  
 CONCRETE PRODUCTS  
 SCITUATE CONCRETE PRODUCTS  
 P.O. BOX 636 120 CLAY PIT RD  
 MARSHFIELD, MA 02050  
 PHONE # 1-800-322-4488  
 FAX # 781-545-6021

CONTRACTOR:		JOB NAME:	
DATE:	APPROVED BY:	DRAWING BY: C.J. SCOTT	

