


60" RCP O-RING JOINT REINFORCED

DESIGN NOTES:

1. MFG. IN ACCORDANCE WITH ASTM SPEC. C76 & AASHO SPEC. M170, WALL C.
2. CEMENT TYPE II
3. CONCRETE STRENGTH CLASS III & IV 4,000psi CLASS V 6,000psi
4. CIRCUM. REINFORCEMENT:

CLASS III	0.24 SQ. IN. PER FT. INNER CAGE
	0.15 SQ. IN. PER FT. OUTER CAGE
CLASS IV	0.41 SQ. IN. PER FT. INNER CAGE
	0.24 SQ. IN. PER FT. OUTER CAGE
CLASS V	0.70 SQ. IN. PER FT. INNER CAGE
	0.42 SQ. IN. PER FT. OUTER CAGE
5. LAYING LENGTH 8'-0"
6. RUBBER GASKET ASTM SPEC. C443

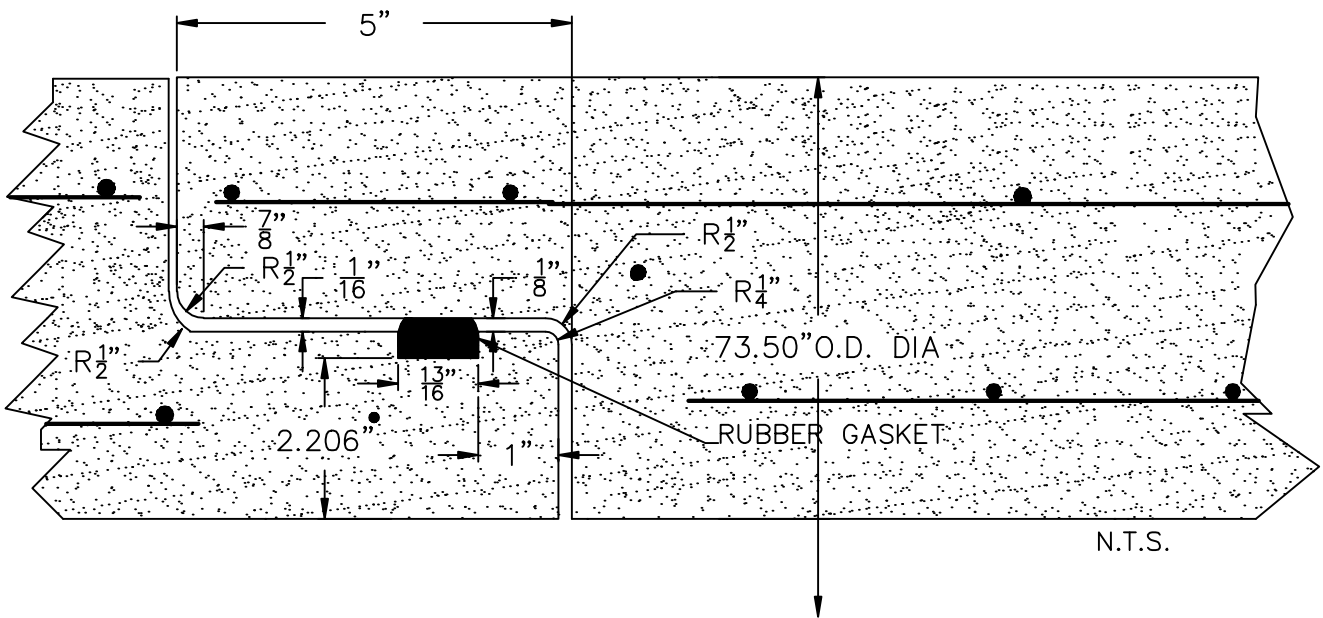

	SCITUATE CONCRETE PRODUCTS P.O. BOX 636 120 CLAY PIT RD MARSHFIELD, MA 02050 PHONE # 1-800-322-4488 FAX # 781-545-6021
--	--

CONTRACTOR:	JOB NAME:	
DATE:	APPROVED BY:	DRAWING BY: C.J. SCOTT

